


AGT GERMAN TECHNICS

Industrial Components and Equipment

Square Profiles Hot Rolled DIN EN 10210

DIN EN 10210 (DIN 59410)
S235 JRG (R St 37-2), S 275 J2 G 3/4 (St 44-3)
S 355 J 2 G 3 / 4 (St 52-3)

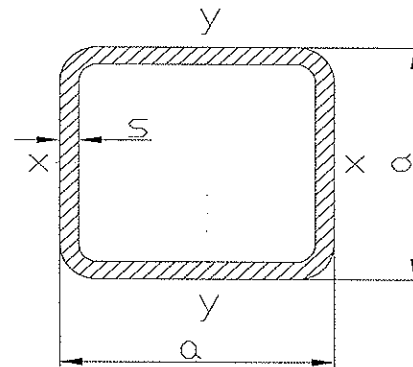

<i>l</i> <i>a</i> mm	<i>t</i> <i>s</i> mm	Theoretical Wt. kg/m
20	2.0	1.05
25	2.0	1.36
25	2.5	1.64
25	3.0	1.89
30	2.0	1.68
30	2.5	2.03
30	3.0	2.36
40	2.0	2.31
40	2.5	2.82
40	3.0	3.30
40	4.0	4.20
50	2.0	2.93
50	2.5	3.60
50	3.0	4.25
50	4.0	5.45
50	5.0	6.56
60	2.0	3.56
60	2.5	4.39
60	3.0	5.19
60	4.0	6.71
60	5.0	8.13
60	6.0	9.45
60	6.3	9.55
70	2.5	5.17
80	3.0	7.07
80	4.0	9.22
80	5.0	11.30
80	6.0	13.20
80	6.3	13.50
80	8.0	16.40
90	3.0	8.01
90	4.0	10.50
90	5.0	12.80
90	6.0	15.10
90	6.3	15.50
90	8.0	18.90
100	3.0	8.96

<i>l</i> <i>a</i> mm	<i>t</i> <i>s</i> mm	Theoretical Wt. kg/m
100	6.3	17.50
100	8.0	21.40
100	10.0	25.60
100	12.0	28.30
100	12.5	29.10
120	3.0	10.80
120	4.0	14.20
120	5.0	17.50
120	6.0	20.70
120	6.3	21.40
120	8.0	26.40
120	10.0	31.80
120	12.0	35.80
120	12.5	36.90
140	4.0	16.80
140	5.0	20.70
140	6.0	24.50
140	6.3	25.40
140	8.0	31.40
140	10.0	38.10
140	12.0	43.40
140	12.5	44.80
150	4.0	18.00
150	5.0	22.30
150	6.0	26.40
150	6.3	27.40
150	8.0	33.90
150	10.0	41.30
150	12.0	47.10
150	12.5	48.70
150	16.0	58.70
160	4.0	19.30
160	5.0	23.80
160	6.0	28.30
160	6.3	29.30
160	8.0	36.50
160	10.0	44.40


AGT GERMAN TECHNICS

Industrial Components and Equipment

Square Profiles

Hot Rolled DIN EN 10210

DIN EN 10210 (DIN 59410)
S235 JRG (R St 37-2), S 275 J2 G 3/4 (St 44-3)
S 355 J 2 G 3 / 4 (St 52-3)

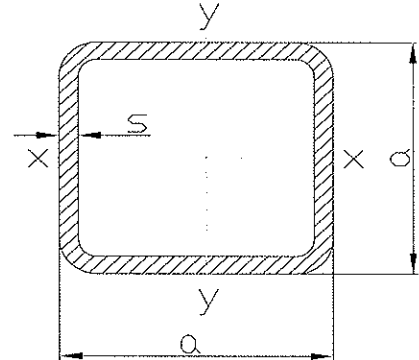

<i>l</i> <i>a</i> <i>mm</i>	<i>t</i> <i>s</i> <i>mm</i>	<i>Theoretical</i> <i>Wt.</i> <i>kg/m</i>
100	4.0	11.70
100	5.0	14.40
100	6.0	17.00
180	4.0	21.80
180	5.0	27.00
180	6.0	32.10
180	6.3	33.30
180	8.0	41.50
180	10.0	50.70
180	12.0	58.50
180	12.5	60.50
180	16.0	73.80
200	4.0	24.30
200	5.0	30.10
200	6.0	35.80
200	6.3	37.20
200	8.0	46.50
200	10.0	57.00
200	12.0	66.00
200	12.5	68.30
200	16.0	83.80
220	5.0	33.20
220	6.0	39.60
220	6.3	41.20
220	8.0	51.50
220	10.0	63.20
220	12.0	73.50
220	12.5	76.20
220	16.0	93.90
250	5.0	38.00
250	6.0	45.20
250	6.3	47.10

<i>l</i> <i>a</i> <i>mm</i>	<i>t</i> <i>s</i> <i>mm</i>	<i>Theoretical</i> <i>Wt.</i> <i>kg/m</i>
160	12.0	50.90
160	12.5	52.60
160	16.0	63.70
250	8.0	59.10
250	10.0	72.70
250	12.0	84.80
250	12.5	88.00
250	16.0	109.00
260	6.0	47.10
260	6.3	49.10
260	8.0	61.60
260	10.0	75.80
260	12.0	88.60
260	12.5	91.90
260	16.0	114.00
300	6.0	54.70
300	6.3	57.00
300	8.0	71.60
300	10.0	88.40
300	12.0	104.00
300	12.5	108.00
300	16.0	134.00
350	8.0	84.20
350	10.0	104.00
350	12.0	123.00
350	12.5	127.00
350	16.0	159.00
400	10.0	120.00
400	12.0	141.00
400	12.5	147.00
400	16.0	184.00